


Insulated Guide and Slide Selection Chart

- ◆ Shaded Areas Indicate Recommended Applications.
- ◆ 'Bottom Of Pipe' to 'Top Of Steel' (BOP-TOS)
Dim. 'A' Shown In Application Boxes.
- ◆ PG-1 Units Allow +/- 2" of Axial Travel.
- ◆ PG-2 and PG-3 Allow +/- 2" of Axial Travel.
- ◆ Specify 'PLUS' For +/- 4-1/2" of Axial Travel.
- ◆ Dim.'L' - 6" Standard, 12" on PLUS Models

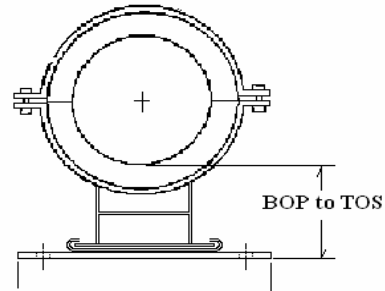

PG-1 and PS-1

Insulation Thickness	PIPE SIZE							
	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3
1"	4.40	4.30	4.40	4.30	4.40	4.40	4.40	4.40
1-1/2"	4.90	4.90	4.60	5.00	4.90	4.90		
2"	5.40	5.30	5.40	5.30				
2-1/2"								
3"								
3-1/2"								
4"								
ALLOWABLE LOAD (Vertical & Lateral)	115	145	185	235	265	355	405	495

PG-2 and PS-2

Insulation Thickness	PIPE SIZE						
	2	2-1/2	3	4	5	6	8
1"				4.30	4.30	4.30	4.40
1-1/2"		5.00	4.80	4.80	4.80	4.80	4.90
2"	5.30	5.60	5.30	5.80	5.30	5.40	
2-1/2"	5.90	6.10	5.80	5.80	5.90	5.90	
3"	6.40	6.60	6.30	6.40	6.40		
3-1/2"	6.90	7.20	7.00	7.00			
4"	7.50	7.80	7.50				
ALLOWABLE LOAD (Vertical & Lateral)	670	810	990	1270	1570	1870	2430

PG-3 and PS-3

Insulation Thickness	PIPE SIZE							
	4	5	6	8	10	12	14	16
1"					5.80	6.00	5.90	6.10
1-1/2"					6.50	6.50	6.60	6.60
2"				6.80	7.00	7.20	7.10	7.10
2-1/2"				7.50	7.50	7.80	7.60	
3"			7.80	8.10	8.10	8.20	8.10	
3-1/2"		8.40	8.50	8.60	8.80	8.80		
4"	8.90	9.00	9.00	9.20	9.20			
ALLOWABLE LOAD (Vertical & Lateral)	1690	2100	2500	3250	4050	4800	5300	6100